

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
29 December 2004 (29.12.2004)

PCT

(10) International Publication Number  
**WO 2004/114667 A1**

(51) International Patent Classification<sup>7</sup>: **H04N 7/24**, 7/50

08550 (US). **COOPER, Jeffrey, Allen** [US/US]; 11 Toth Lane, Rocky Hill, New Jersey 08553 (US).

(21) International Application Number:  
PCT/US2004/018763

(74) Agents: **TRIPOLI, Joseph, S.** et al.; c/o THOMSON Licensing Inc., Two Independence Way, Suite 200, Princeton, New Jersey 08540 (US).

(22) International Filing Date: 15 June 2004 (15.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/478,923 16 June 2003 (16.06.2003) US

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): **THOMSON LICENSING S.A.** [FR/FR]; 46 Quai A. Le Gallo, F-92100 Boulogne-Billancourt (FR).

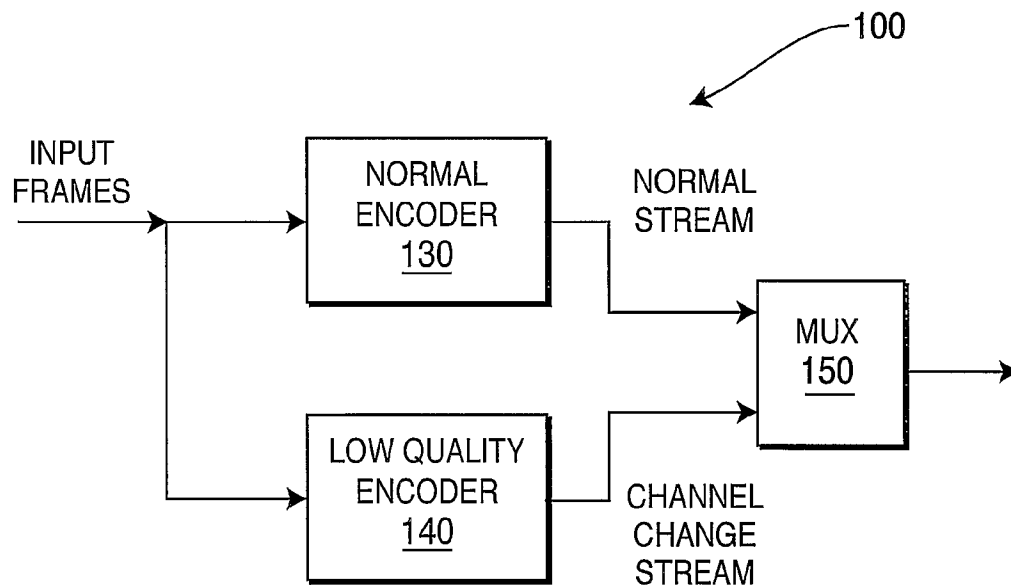
(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **BOYCE, Jill, MacDonald** [US/US]; 3 Brandywine Court, Manalapan, New Jersey 07726 (US). **TOURAPIS, Alexandros, Michael** [GR/US]; 20212 Heather Drive, West Windsor, New Jersey

[Continued on next page]

(54) Title: ENCODING METHOD AND APPARATUS ENABLING FAST CHANNEL CHANGE OF COMPRESSED VIDEO



(57) Abstract: A video encoder (100, 300, 500) and corresponding method (800) are described for enabling fast channel change of compressed video, where a video encoder (100, 300, 500) for receiving input pictures and providing compressed stream data includes a normal encoding portion (130, 330, 530) for receiving input pictures and providing normal stream data, a lower-quality encoding portion (140, 340, 540) for receiving input pictures and providing channel change stream data, and a multiplexor (150, 350, 550) in signal communication with each of the normal and lower-quality portions for receiving and combining the normal and channel change data streams.



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

## ENCODING METHOD AND APPARATUS ENABLING FAST CHANNEL CHANGE OF COMPRESSED VIDEO

### CROSS-REFERENCE TO RELATED APPLICATION

5           This application claims the benefit of U.S. Provisional Application Serial No. 60/478,923 (Attorney Docket No. PU030170), filed June 16, 2003 and entitled "METHOD AND APPARATUS ENABLING FAST CHANNEL CHANGE OF COMPRESSED VIDEO", which is incorporated herein by reference in its entirety.

### 10   FIELD OF THE INVENTION

          The present invention is directed towards video encoders and decoders (CODECs), and more particularly, towards an apparatus and method for reducing the perceived delay for the initial display of decoded video content following a channel change.

15

### BACKGROUND OF THE INVENTION

          Popular video compression standards, such as MPEG-2 and JVT/H.264/MPEG AVC, use intra and inter coding. For proper decoding, a decoder decodes a compressed video sequence beginning with an intra-coded (I) picture, and  
20   then continues to decode the subsequent inter-coded (P and B) pictures. A Group of Pictures (GOP) may include an I picture and several subsequent P and B pictures. I pictures typically require many more bits to code than does a P or B picture of equivalent video quality.

          When a receiver initially begins receiving a program on a particular channel,  
25   such as following a channel change or initial turning on of the receiver, it must wait until an I picture is received to begin decoding properly, which causes a delay. To minimize channel change delay in digital video broadcast systems, I pictures are typically sent frequently, such as every N pictures. For example, to enable ½ second delay of the video decompression portion of the system, it is common to use N=15 for  
30   30 fps content. Because compressed I pictures are so much larger than compressed P and B pictures, this considerably increases the bitrate over what would be required if I pictures were not inserted so frequently.

Most broadcast systems transmit I pictures frequently, for example every  $\frac{1}{2}$  second, in order to limit the channel change delay time due to the video decoding system. In some systems, instead of sending full I pictures frequently, a technique called "progressive refresh" is used, where sections of pictures are intra coded.

5 Typically, all macroblocks in the picture are intra-coded at least once during an N-picture period.

In the JVT/H.264/MPEG AVC compression standard, P and B pictures may be predicted using multiple reference pictures, including the pictures before a preceding I picture. The standard identifies random access points as Independent Decoder  
10 Refreshes, or IDRs, which constrain that no reference pictures before each IDR are used in predicting pictures following the IDR.

The JVT/H.264/MPEG AVC compression standard includes a tool called redundant pictures, defined in the standard as:

15 **redundant coded picture:** A coded representation of a *picture* or a part of a *picture*. The content of a redundant coded picture shall not be used by the *decoding process* for a *bitstream* conforming to this Recommendation 1 International Standard. A *redundant coded picture* is not required to contain all *macroblocks* in the *primary coded picture*. Redundant  
20 coded pictures have no normative effect on the *decoding process*. See also *primary coded picture*.

The slice header contains a **redundant\_pic\_cnt** field, whose semantics are defined as:

25 **redundant\_pic\_cnt** shall be equal to 0 for slices and slice data partitions belonging to the primary coded picture. The **redundant\_pic\_cnt** shall be greater than 0 for coded slices and coded slice data partitions in redundant coded pictures. When **redundant\_pic\_cnt** is not present, its value shall be  
30 inferred to be equal to 0. The value of **redundant\_pic\_cnt** shall be in the range of 0 to 127, inclusive.

-- If the syntax elements of a slice data partition A RBSP indicate the presence of any syntax elements of category 3 in the slice data for a

slice, a slice data partition B RBSP shall be present having the same value of slice\_id and redundant\_pic\_cnt as in the slice data partition A RBSP.

5           -- Otherwise (the syntax elements of a slice data partition A RBSP do not indicate the presence of any syntax elements of category 3 in the slice data for a slice), no slice data partition B RBSP shall be present having the same value of slice\_id and redundant\_pic\_cnt as in the slice data partition A RBSP.

10           Accordingly, what is needed is an apparatus and method for reducing the perceived delay for the initial display of decoded video content following a channel change.

#### SUMMARY OF THE INVENTION

15           These and other drawbacks and disadvantages of the prior art are addressed by an apparatus and method that provide for fast channel change of compressed video content.

          A video encoder for receiving input pictures and providing compressed stream data includes a normal encoding portion for receiving input pictures and providing  
20   normal stream data, a lower-quality encoding portion for receiving input pictures and providing channel change stream data, and a multiplexor in signal communication with each of the normal and lower-quality portions for receiving and combining the normal and channel change data streams.

          These and other aspects, features and advantages of the present invention  
25   will become apparent from the following description of exemplary embodiments, which is to be read in conjunction with the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

          The present invention may be better understood in accordance with the  
30   following exemplary figures, in which:

          Figure 1 shows a block diagram for an encoder using normal resolution for the channel change stream in accordance with principles of the present invention;

Figure 2 shows a block diagram for a decoder using normal resolution for the channel change stream in accordance with principles of the present invention;

Figure 3 shows a block diagram for an encoder using a low-pass filtered channel change stream in accordance with principles of the present invention;

5        Figure 4 shows a table for an exemplary picture pattern in accordance with principles of the present invention;

Figure 5 shows a block diagram for an encoder using a downsampled channel change stream in accordance with principles of the present invention;

10       Figure 6 shows a block diagram for a decoder using a downsampled channel change stream in accordance with principles of the present invention;

Figure 7 shows a block diagram for a decoder using a downsampled channel change stream and a postprocessing filter in accordance with principles of the present invention;

15       Figure 8 is a flow chart of a video encoding method in accordance with principles of the present invention; and

Figure 9 is a flow chart of a video decoding method in accordance with principles of the present invention.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

20       Embodiments of the present invention provide allow channel change delay at any desired rate with a lower bitrate than prior art methods. That is, the invention enables low delay channel change time in a compressed video broadcast system, while significantly reducing the bitrate over prior methods of enabling low-delay channel change. In the JVT/H.264/MPEG AVC standard, individual P and B pictures  
25       are coded using one or more different slice types (I, P and/or B), while I pictures are coded using only I slices. Accordingly, in the description that follows, the term "slice" may be substituted for the term "picture" depending on the context and applicable standard. Prior art systems broadcast I pictures frequently to enable channel change, for example every N pictures. In embodiments of the present invention,  
30       normal I pictures are sent less frequently, and additional lower quality I pictures are sent more frequently.

In accordance with the principles of the present invention, a desired channel change delay can be achieved without requiring I pictures to be sent as frequently as

is done in prior art systems. Instead, additional lower quality coded pictures, included in what is herein called the channel change stream, are sent in addition to the normal quality coded pictures. In the channel change stream, lower quality I pictures are sent at the desired channel change frequency, and are used at the decoder during the initial period following a channel change. Normal quality I pictures are sent in the normal stream at a lower frequency, and are used at the decoder once they are available.

For example, consider a system that sends I pictures in the normal stream every  $N \cdot K$  pictures and lower quality I pictures in the channel change stream every N pictures, with  $K > 1$ . Each coded picture in the channel change stream corresponds to a normal stream coded picture. Thus, when a coded picture is present in the channel change stream, two coded representations of that picture are actually transmitted.

When a channel change occurs, a decoding system starts decoding the compressed video as soon as it receives an I picture, either from the normal stream or from the channel change stream. If the first I picture to arrive is from the normal stream, the decoder continues normally. However, if the first I picture to arrive is a lower quality I picture from the channel change stream, the decoder decodes and uses the lower quality I picture. This causes lower quality video to be displayed until a normal quality I picture arrives. This period of lower quality video is not significantly noticeable to a viewer as it is of short duration and immediately follows a channel change. The human visual system takes some time to adjust to a new visual scene.

The channel change stream may either contain only lower quality I pictures, or may contain lower quality I, P and B pictures. The picture rate of the channel change stream may be lower than that of the normal stream. The lower quality pictures may be of the same resolution as the normal pictures but encoded at a lower bitrate, or may be of a lower resolution than the normal pictures. The bitstream size of the lower quality I coded pictures in the channel change stream are small compared with the size of normal quality coded I pictures in the normal stream. So even though additional coded representations of the same picture are being transmitted, overall bitrate savings occur because the size of a normal quality P or B picture plus the lower quality I picture is typically significantly less than that of a normal quality I picture alone.

If the channel change stream contains low quality I, P and B pictures, after a channel change the decoder system waits for the arrival of a lower quality I picture, and then it decodes and displays the lower quality pictures from the channel change stream until a normal quality I picture is received, at which point it switches to the  
5 normal quality stream.

If the channel change stream contains only I pictures, the decoding system waits for the arrival of an I picture in either the normal stream or channel change stream after a channel change. If the first I picture to arrive is in the channel change stream, the decoding system decodes and displays the lower quality I picture. Then  
10 this lower quality picture is stored in the normal decoder picture stores and the decoding system begins decoding the subsequent normal stream P and B pictures, using the lower quality I picture from the channel change stream as a reference. Because these normal quality P and B pictures were inter-coded based on prior pictures in the normal stream rather than the corresponding lower quality I picture  
15 from the channel change stream, this will cause some decoding drift.

Experiments have shown, however, that the visual impact of such drift is small in this situation, because it lasts for only a short duration and immediately follows a scene change corresponding to the channel change. The encoder can manage how much drift would occur and adjust coding parameters of the normal and/or channel  
20 change stream pictures appropriately such that drift does not exceed reasonable limits.

The instant description illustrates the principles of the invention. It will thus be appreciated that those skilled in the art will be able to devise various arrangements that, although not explicitly described or shown herein, embody the principles of the  
25 invention and are included within its spirit and scope.

All examples and conditional language recited herein are intended for pedagogical purposes to aid the reader in understanding the principles of the invention and the concepts contributed by the inventor to furthering the art, and are to be construed as being without limitation to such specifically recited examples and  
30 conditions.

Moreover, all statements herein reciting principles, aspects, and embodiments of the invention, as well as specific examples thereof, are intended to encompass both structural and functional equivalents thereof. Additionally, it is intended that



such equivalents include both currently known equivalents as well as equivalents developed in the future, i.e., any elements developed that perform the same function, regardless of structure.

Thus, for example, it will be appreciated by those skilled in the art that the  
5 block diagrams presented herein represent conceptual views of illustrative circuitry embodying the principles of the invention. Similarly, it will be appreciated that any flow charts, flow diagrams, state transition diagrams, pseudocode, and the like represent various processes which may be substantially represented in computer readable media and so executed by a computer or processor, whether or not such  
10 computer or processor is explicitly shown.

The functions of the various elements shown in the figures may be provided through the use of dedicated hardware as well as hardware capable of executing software in association with appropriate software. When provided by a processor, the functions may be provided by a single dedicated processor, by a single shared  
15 processor, or by a plurality of individual processors, some of which may be shared. Moreover, explicit use of the term "processor" or "controller" should not be construed to refer exclusively to hardware capable of executing software, and may implicitly include, without limitation, digital signal processor ("DSP") hardware, read-only memory ("ROM") for storing software, random access memory ("RAM"), and  
20 non-volatile storage.

Other hardware, conventional and/or custom, may also be included. Similarly, any switches shown in the figures are conceptual only. Their function may be carried out through the operation of program logic, through dedicated logic, through the interaction of program control and dedicated logic, or even manually, the particular  
25 technique being selectable by the implementer as more specifically understood from the context.

In the claims hereof, any element expressed as a means for performing a specified function is intended to encompass any way of performing that function including, for example, a) a combination of circuit elements that performs that  
30 function or b) software in any form, including, therefore, firmware, microcode or the like, combined with appropriate circuitry for executing that software to perform the function. The invention as defined by such claims resides in the fact that the functionalities provided by the various recited means are combined and brought

together in the manner which the claims call for. Applicant thus regards any means that can provide those functionalities as equivalent to those shown herein.

As shown in Figure 1, an encoder in accordance with principles of the present invention is indicated generally by the reference numeral 100. The encoder 100 uses the same resolution for each of the normal stream and the channel change stream, and includes a normal encoder portion 130 for producing the normal stream and a low-quality encoder portion 140 for producing the channel change stream, each receiving the same resolution input pictures. The normal portion 130 and the low-quality portion 140 are each coupled in signal communication with a multiplexor (mux) 150, for providing the normal and channel change streams, respectively, to the mux 150 for transmission.

Turning to Figure 2, a decoder in accordance with principles of the present invention is indicated generally by the reference numeral 200. The decoder 200 uses the same resolution for each of the normal stream and the channel change stream, and includes a demultiplexor (demux) 210 for receiving compressed video data and demultiplexing the normal and channel change streams, each coupled in selectable signal communication with a normal decoder portion 212. The normal decoder portion 212 is coupled in signal communication with frame stores 214, and outputs decoded video to a display.

Thus, Figure 1 shows an encoding system and Figure 2 shows a decoding system that each use the same resolution images for both the normal stream and the channel change stream. In operation, the normal encoder portion creates normal quality compressed video pictures for the normal stream, and a parallel low-quality encoder portion creates lower quality compressed video pictures for the channel change stream. The encoder 100 shows two separate encoder blocks for the two encoder functions, but, as will be recognized by those of ordinary skill in the pertinent art, the two encoder functions could be performed using the same encoder device. The normal stream and channel change stream are multiplexed together, if necessary, and transmitted. In the decoding system, a demux separates the normal stream and channel change stream, and a selection is made as to whether the picture from the normal stream or the channel change stream should be sent to the decoder.

Turning now to Figure 3, an encoder in accordance with principles of the present invention is indicated generally by the reference numeral 300. The encoder 300 uses filtered data for the channel change stream, and includes a normal encoder portion 330 for producing the normal stream, and a low-pass filter 332 in signal communication with a low-quality encoder portion 340 for producing the filtered channel change stream. The normal portion 330 and the low-quality portion 340 are each coupled in signal communication with a mux 350, for providing the normal and channel change streams, respectively, to the mux 350 for output.

Thus, Figure 3 shows an alternate encoding system, which applies a low-pass filter to the input pictures prior to the lower quality encoder. Because the pictures in the channel change stream are coded at a relatively low bitrate, they may contain visible coding artifacts. By low-pass filtering the images prior to encoding, some of these visible coding artifacts may be removed.

The multiplexor arranges the transmission time of the coded pictures such that the channel change stream I pictures are interspersed with the normal stream coded pictures. The channel change stream coded picture is preferably transmitted near the time that the normal stream picture corresponding to the same input picture is transmitted, and before any normal stream pictures that are inter-predicted with respect to that picture.

As shown in Figure 4, an exemplary picture pattern is indicated generally by the reference numeral 400 for the case where only I pictures are included in the channel change stream, with  $N = 12$  and  $K = 3$ . For an exemplary 24 fps sequence where channel change start periods of  $\frac{1}{2}$  second are desired, lower quality I pictures are inserted in the channel change stream every 12 pictures. Normal quality I pictures are inserted in the normal stream every 36 pictures.

Consider the case where a receiver tuned in to the channel while picture 5 was being received. The receiver would then wait until the first I picture in either stream arrived, which in this example is 12 in the channel change stream, and decode and display it. The decoded lower quality I picture 12 from the channel change stream would then be placed in the decoder's picture store, and used in decoding pictures 12-23 from the normal stream. These decoded pictures will contain drift. When normal quality P picture 24 arrives in the normal stream, the receiver may either choose to decode the normal stream's P picture 24 or the channel change stream's I

picture 24. This could either be a receiver end decision, or a preference could be signaled by the encoder in the bitstream, based on which one will yield less drift. The normal stream's pictures 25-35 are then decoded, still with drift. Once the normal stream's picture 36 is received, which is an I picture, the decoder can start decoding properly without added drift for all subsequent pictures. From the viewer's perspective, for a short period after a channel change, here up to about 1.5 seconds, lower quality video is displayed, and then normal quality is displayed.

Bitrate savings versus a prior art system is achieved because the large normal stream I pictures are sent less frequently than they would be sent in a prior art system. The lower quality I pictures sent in the channel change stream are much smaller than the normal quality I pictures. An encoding system may send the lower quality I pictures in the channel change stream as frequently as desired, and with any pattern. I pictures in the normal stream also need not follow a regular pattern, and for example may be inserted whenever a scene change occurs. An encoding system does not need to insert channel change stream I pictures if the distance between I pictures in the normal stream does not exceed a desired value. The encoding system may choose to insert I pictures in the channel change stream whenever necessary to maintain a maximum I picture spacing, associated with a desired channel change delay limit, for example.

The channel change stream may contain pictures of different resolutions. For example, some of the I pictures in the channel change stream may be of the same resolution as the normal stream and others may be at a lower resolution. Alternately, two or more different lower resolutions for pictures in the channel change stream may be used.

In order to reduce the drift that occurs when decoding a normal stream picture using a channel change stream picture as a predictor, the encoder can restrict the range of allowable reference pictures for the P and B pictures that follow the normal stream picture that corresponds to the channel change stream I picture. In the JVT/H.264 video compression standard, P and B pictures may be predicted using multiple reference pictures, which provides a coding efficiency advantage over using a single reference picture. For the example in Figure 4, a restriction may be imposed such that pictures 12-23 in the normal stream may not use reference pictures prior to picture 12. If this restriction were not imposed, more drift would occur following a

channel change. For example, if picture 15 was predicted from both pictures 12 and 9, and a channel change occurred while picture 5 was being received, the decoding system would have a representation of picture 12, from the channel change stream I picture 12, but would not have any representation of picture 9. This could lead to a  
5 significant reduction in visual quality when decoding pictures 13-23. However, if a restriction were imposed that picture 15 be predicted only from picture 12, this significant drift can be avoided, with a small penalty in the coding efficiency of picture 15.

Turning to Figure 5, an encoder in accordance with principles of the present  
10 invention is indicated generally by the reference numeral 500. The encoder 500 uses downsampled data for the channel change stream, and includes a normal encoder portion 530 for producing the normal stream, and a downsampler 534 in signal communication with a low-quality encoder portion 540 for producing the filtered  
channel change stream. The normal portion 530 and the low-quality portion 540 are  
15 each coupled in signal communication with a mux 550, for providing the normal and channel change streams, respectively, to the mux 550 for output.

Turning now to Figure 6, a decoder in accordance with principles of the present invention is indicated generally by the reference numeral 600. The decoder 600 uses downsampled data for the channel change stream, and includes a demux  
20 610 for receiving compressed video data, coupled in signal communication with each of a normal decoder portion 612 and a lower resolution decoder portion 618. The normal decoder portion 612 is coupled in signal communication with frame stores 614, and selectably outputs decoded video to a display and to the frame stores 614. The lower resolution decoder portion 618 is coupled in signal communication with  
25 frame stores 620, and outputs decoded video to an upsampler 622, which, in turn, selectably outputs upsampled decoded video to a display and to the frame stores 614.

Thus, Figure 5 shows an encoding system and Figure 6 shows a decoding system, each of which use lower resolution images for lower quality pictures in the  
30 channel change stream than for the normal pictures. For example, 704x480 pixels could be used for the normal pictures and 352x240 pixels for the channel change pictures. The input pictures are encoded normally for the normal stream, and are resized to a lower resolution and encoded at that lower resolution for the channel

change stream. The normal stream and the channel change stream are multiplexed together and transmitted. In the decoding system, a demux separates the normal stream and the channel change stream, and a selection is made as to whether the picture from the normal stream or the channel change stream should be decoded and displayed. If the channel change stream is decoded and displayed, the decoded picture is put into the normal stream decoder's picture store for use in decoding subsequent normal stream coded pictures. Although separate blocks are provided in the figure for the normal decoder and lower quality decoder, both functions may be performed using a single device as will be recognized by those of ordinary skill in the pertinent art.

In the decoding system, following a channel change, lower quality video is initially displayed, and once an I picture in the normal stream is received, normal quality video begins to be displayed. The abrupt transition from lower quality video to normal quality video may be more noticeable to a viewer than the lower quality video itself. To reduce the abruptness of the transition, a postprocessor may be added following the decoder to filter the decoded pictures. The filter strength may be adjusted over several pictures, to gradually increase the resolution or quality of the decoded pictures.

Turning now to Figure 7, a decoder in accordance with principles of the present invention is indicated generally by the reference numeral 700. The decoder 700 uses downsampled data for the channel change stream, and includes a demux 710 for receiving compressed video data, coupled in signal communication with each of a normal decoder portion 712 and a lower resolution decoder portion 718. The normal decoder portion 712 is coupled in signal communication with frame stores 714, and selectably outputs decoded video to a display and to the frame stores 714. The normal decoder portion 712 is further coupled in signal communication with a post processing filter 716, which selectably outputs postprocessed decoded video to the display and to the frame stores 714. The lower resolution decoder portion 718 is coupled in signal communication with frame stores 720, and outputs decoded video to an upsampler 722, which, in turn, selectably outputs upsampled decoded video to a display and to the frame stores 714.

Thus, Figure 7 shows a decoding system that incorporates a post processing filter. A post processing function may also be added following the lower quality decoder to hide compression artifacts.

As shown in Figure 8, a video encoding method for receiving input pictures  
5 and providing compressed stream data is indicated generally by the reference numeral 800. The method 800 includes a start block 810 that passes control to an input block 812 for receiving input pictures. The input block 812 passes control to a function block 814 for encoding normal stream data from the received input pictures. The function block 814, in turn, passes control to a function block 816 for encoding  
10 channel change stream data from the received input pictures, where the channel change stream data includes lower-quality encoded data than the normal stream data. The function block 816 passes control to a function block 818 for multiplexing the normal and channel change data streams into a combined output stream, and, in turn, passes control to an end block 820.

Turning to Figure 9, a video decoding method for receiving compressed  
15 stream data and providing decompressed video output is indicated generally by the reference numeral 900. The method 900 includes a start block 910 that passes control to an input block 912 for receiving the compressed stream data, which passes control to a function block 914 for separating the normal stream and the channel  
20 change stream. The function block 914 passes control to a function block 916 for receiving at least one of the compressed normal and channel change streams, and providing decompressed video output. The function block 916, in turn, passes control to a function block 918 for storing reference pictures for use in decoding inter-coded pictures. The function block 918 passes control to an end block 920.

25 There are several possible ways in which the multiplexing of the normal steam and channel change stream may be performed. To enable a backwards compatible system where the normal stream can be decoded without alteration to pre-existing decoders, one method to is place the channel change stream's lower quality coded pictures in user data associated with the corresponding picture of the normal stream.

30 This method allows the decoding system to identify the picture time of a channel change stream coded picture. If this method is used, an alteration to the unique picture start code of the coded pictures in the channel change stream is necessary, such as by using bit or byte stuffing, to help the pre-existing normal

decoder avoid detecting the picture start code of the channel change stream picture inside of the user data. The bit or byte stuffing procedure may be reversed in the decoding system, before passing data to a standards compliant decoder.

5 An alternative multiplexing method is to use a different PID for the channel change stream than for the normal stream. In this case, the channel change stream will need to include timing information for the coded pictures, synchronized with the normal stream pictures. Also, an association must be made between the PIDs of the normal stream and the channel change stream.

10 If the JVT/H.264/MPEG AVC compression standard is used in this system, and the resolution of the normal pictures and channel change pictures are identical, the redundant pictures syntax of JVT may be used for coding the channel change pictures by setting the **redundant\_pic\_cnt** field in the slice header to 1 for the channel change pictures. In this case, in the decoding system, the channel change stream pictures may be identified by searching for pictures containing a  
15 **redundant\_pic\_cnt** field equal to 1 in the slice header.

These and other features and advantages of the present invention may be readily ascertained by one of ordinary skill in the pertinent art based on the teachings herein. It is to be understood that the principles of the present invention may be implemented in various forms of hardware, software, firmware, special purpose  
20 processors, or combinations thereof.

Most preferably, the principles of the present invention are implemented as a combination of hardware and software. Moreover, the software is preferably implemented as an application program tangibly embodied on a program storage unit. The application program may be uploaded to, and executed by, a machine  
25 comprising any suitable architecture. Preferably, the machine is implemented on a computer platform having hardware such as one or more central processing units ("CPU"), a random access memory ("RAM"), and input/output ("I/O") interfaces. The computer platform may also include an operating system and microinstruction code. The various processes and functions described herein may be either part of the  
30 microinstruction code or part of the application program, or any combination thereof, which may be executed by a CPU. In addition, various other peripheral units may be connected to the computer platform such as an additional data storage unit and a printing unit.



It is to be further understood that, because some of the constituent system components and methods depicted in the accompanying drawings are preferably implemented in software, the actual connections between the system components or the process function blocks may differ depending upon the manner in which the present invention is programmed. Given the teachings herein, one of ordinary skill in the pertinent art will be able to contemplate these and similar implementations or configurations of the present invention.

Although the illustrative embodiments have been described herein with reference to the accompanying drawings, it is to be understood that the present invention is not limited to those precise embodiments, and that various changes and modifications may be effected therein by one of ordinary skill in the pertinent art without departing from the scope or spirit of the present invention. All such changes and modifications are intended to be included within the scope of the present invention as set forth in the appended claims.

**CLAIMS**

What is claimed is:

1. A video encoder (100) for receiving input pictures and providing  
5 compressed stream data, the encoder comprising:  
a normal encoding portion (130) for receiving input pictures and providing  
normal stream data;  
a lower-quality encoding portion (140) for receiving input pictures and  
providing channel change stream data; and  
10 a multiplexor (150) in signal communication with each of the normal and lower-  
quality portions for receiving and combining the normal and channel change data  
streams
2. A video encoder as defined in Claim 1, further comprising a low-pass  
15 filter (332) in signal communication with the lower-quality encoding portion (340) for  
providing low-pass filtered input pictures to the lower-quality encoding portion.
3. A video encoder as defined in Claim 1, further comprising a  
downsampling unit (534) in signal communication with the lower-quality encoding  
20 portion (540) for providing downsampled input pictures to the lower-quality encoding  
portion.
4. A video encoder as defined in Claim 1, further comprising means for  
creating a channel change stream with more frequent intra-coded pictures in the  
25 channel change stream than in a corresponding normal stream.
5. A video encoder as defined in Claim 4, further comprising means for  
downsampling to create lower resolution channel change stream pictures.
- 30 6. A video encoder as defined in Claim 1, further comprising means for  
encoding redundant picture syntax in compliance with the JVT standard.

7. A video encoder as defined in Claim 1, further comprising means for encoding channel change pictures into user data of corresponding normal stream pictures.

5 8. A video encoder as defined in Claim 1, further comprising means for signaling to a decoder whether to use normal stream or channel change stream pictures for subsequent channel change stream intra-coded pictures.

9. A video encoder as defined in Claim 1, further comprising a picture  
10 selector in signal communication with the lower-quality encoding portion for selecting a subset of the input pictures to code in the channel change stream.

10. A video encoding method (800) for receiving input pictures and providing compressed stream data, the method comprising:  
15 receiving input pictures (812);  
encoding normal stream data from the received input pictures (814);  
encoding channel change stream data from the received input pictures (816)  
wherein the channel change stream data comprises lower-quality encoded data than the normal stream data; and  
20 multiplexing the normal and channel change data streams into a combined output stream (818).

11. A video encoding method as defined in Claim 10, further comprising at least one of:  
25 creating a channel change stream with more frequent intra-coded pictures in the channel change stream than in a corresponding normal stream;  
downsampling to create lower resolution channel change stream pictures;  
encoding redundant picture syntax in compliance with the JVT standard;  
encoding channel change pictures into user data of corresponding normal  
30 stream pictures; and  
signaling to a decoder whether to use normal stream or channel change stream pictures for subsequent channel change stream intra-coded pictures.

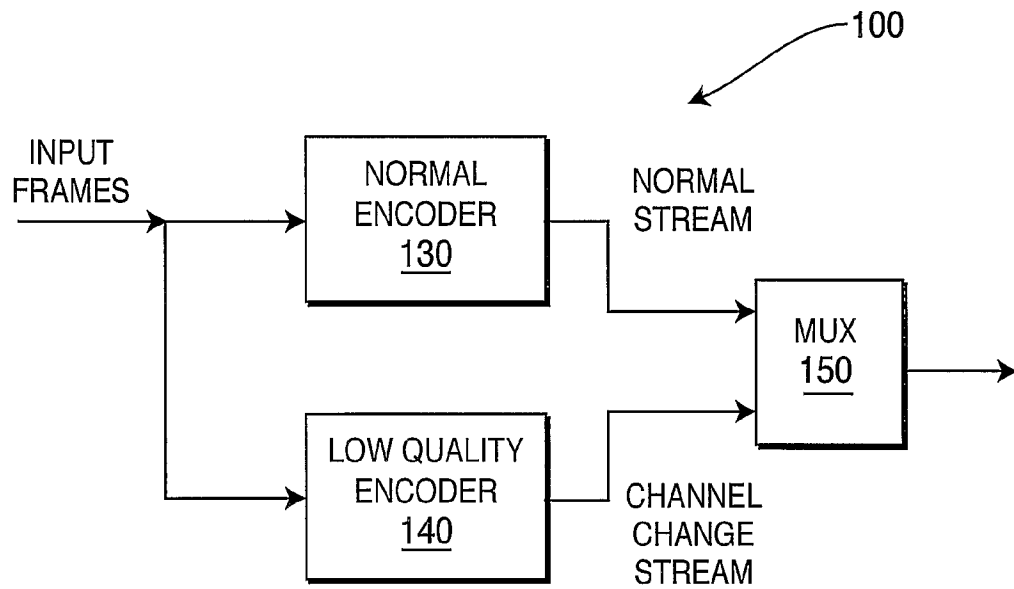
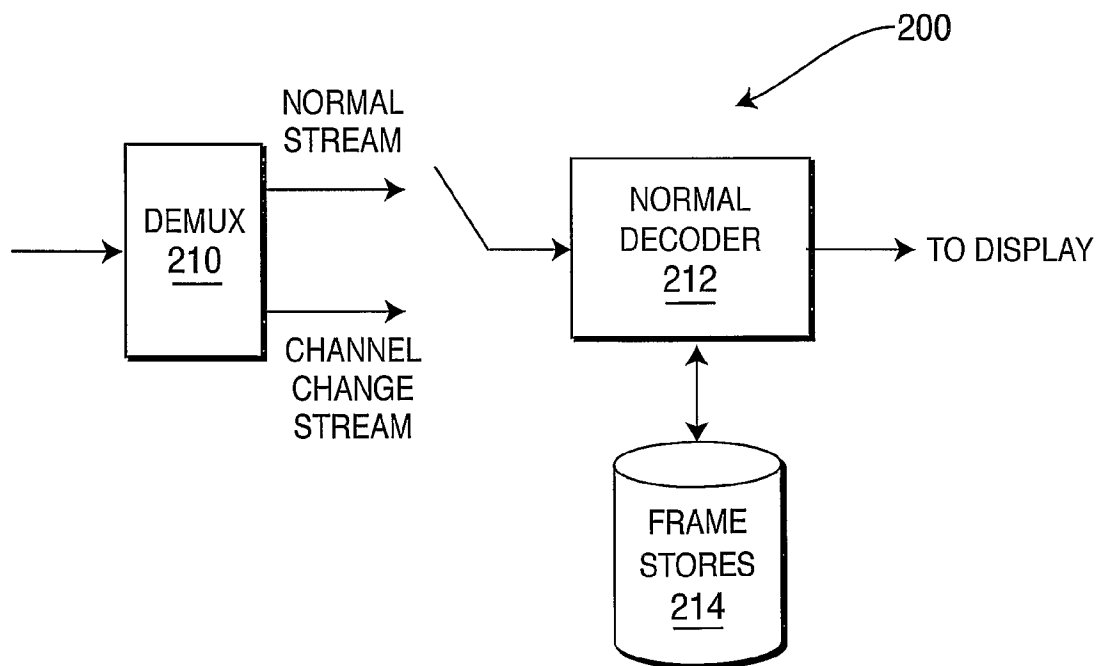
12. A video encoding method as defined in Claim 10, further comprising selecting a subset of the input pictures to code in the channel change stream.

13. A video encoding apparatus for receiving input pictures and providing  
5 compressed stream data, the apparatus comprising:  
means for receiving input pictures;  
means for encoding normal stream data from the received input pictures;  
means for encoding channel change stream data from the received input  
pictures, wherein the channel change stream data comprises lower-quality encoded  
10 data than the normal stream data; and  
means for combining the normal and channel change data streams into a  
combined output stream.

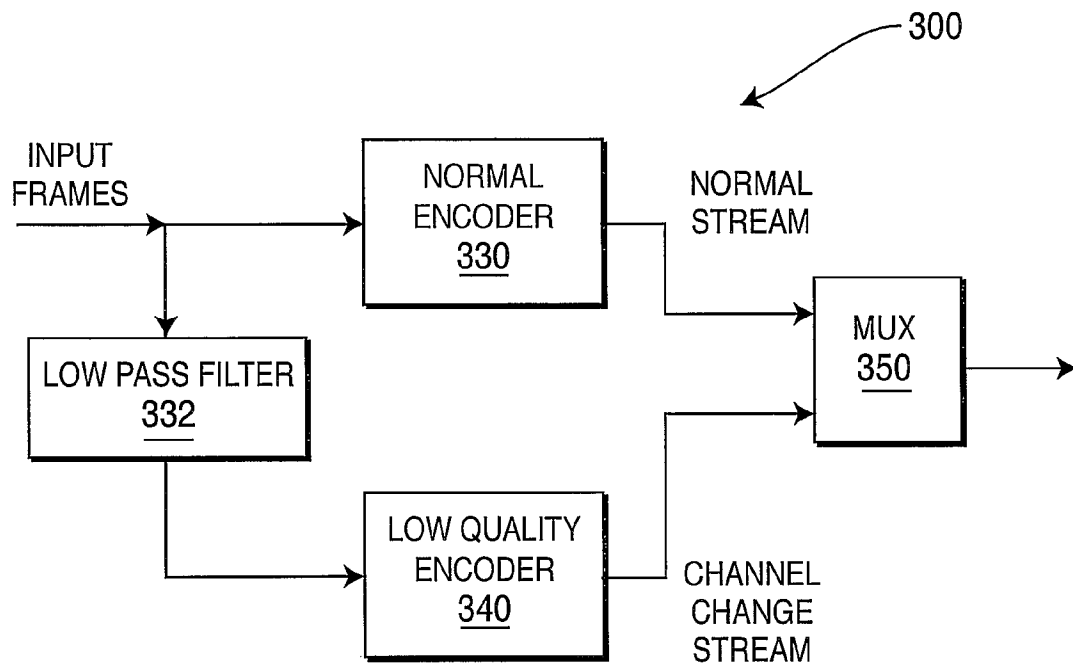
14. A digital videodisc encoded with signal data comprising a plurality of  
15 block transform coefficients for each of normal stream and channel change stream  
data, the coefficients indicative of an original signal data sequence, the normal  
stream data of the digital videodisc having coefficients embodying a normal quality  
data sequence, and the channel change stream of the digital videodisc having  
coefficients embodying a reduced-quality data sequence, the reduced-quality data  
20 sequence comprising at least one additional intra-coded picture.

15. A digital videodisc as defined in Claim 14 wherein the reduced-quality  
data sequence is encoded in the picture user data.

1/5

**FIG. 1****FIG. 2**

2/5

**FIG. 3**

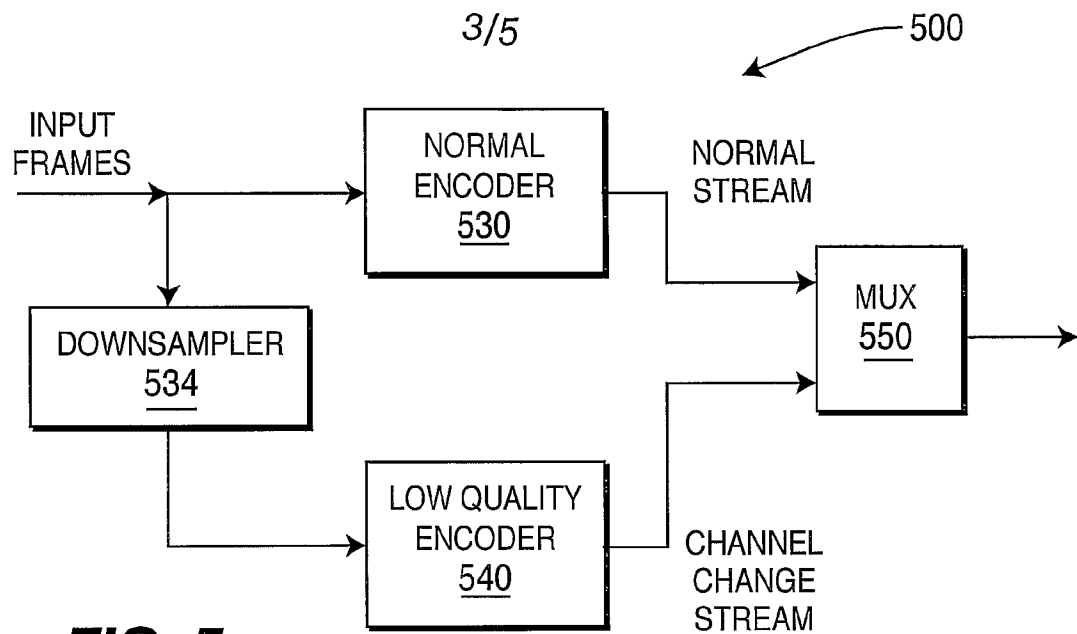
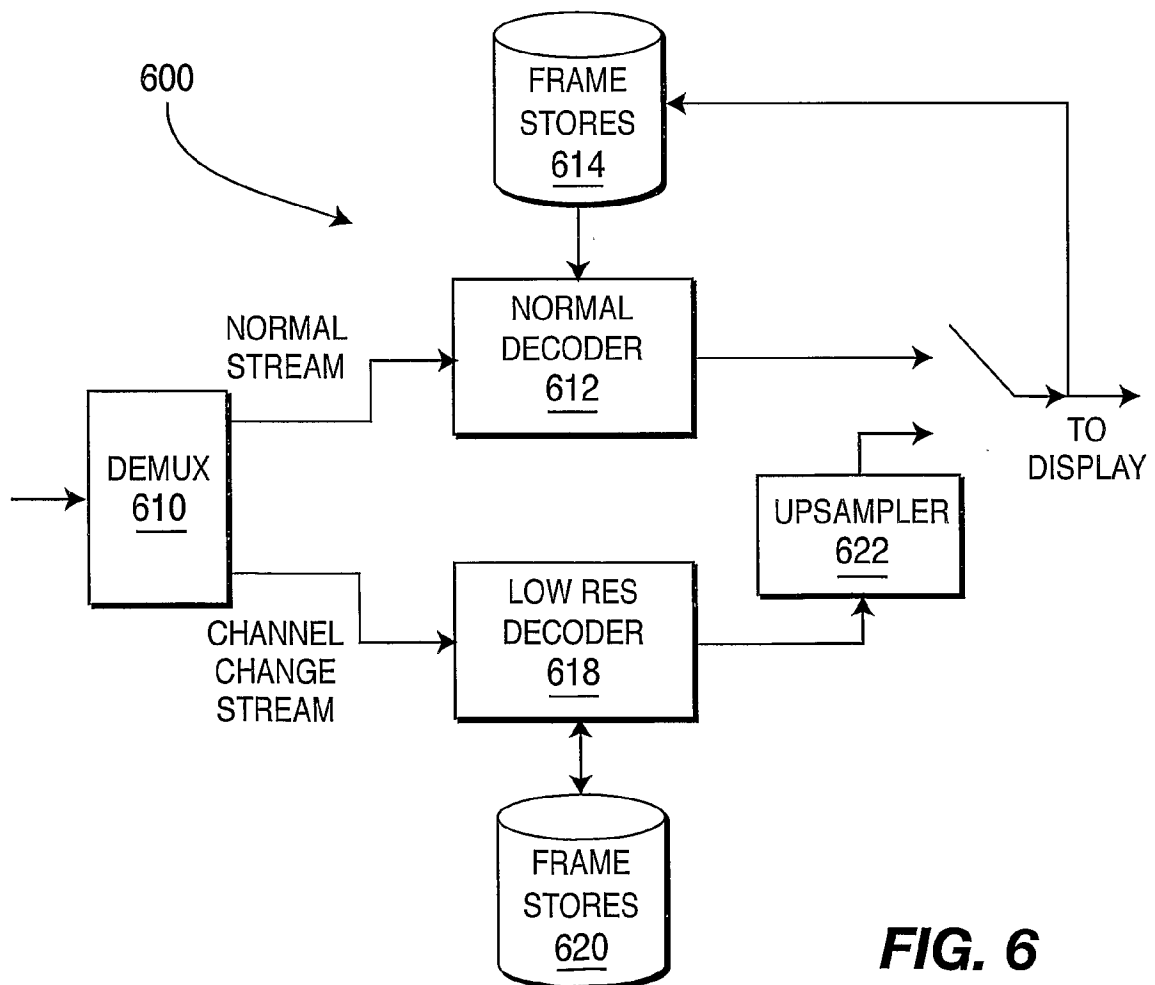
400

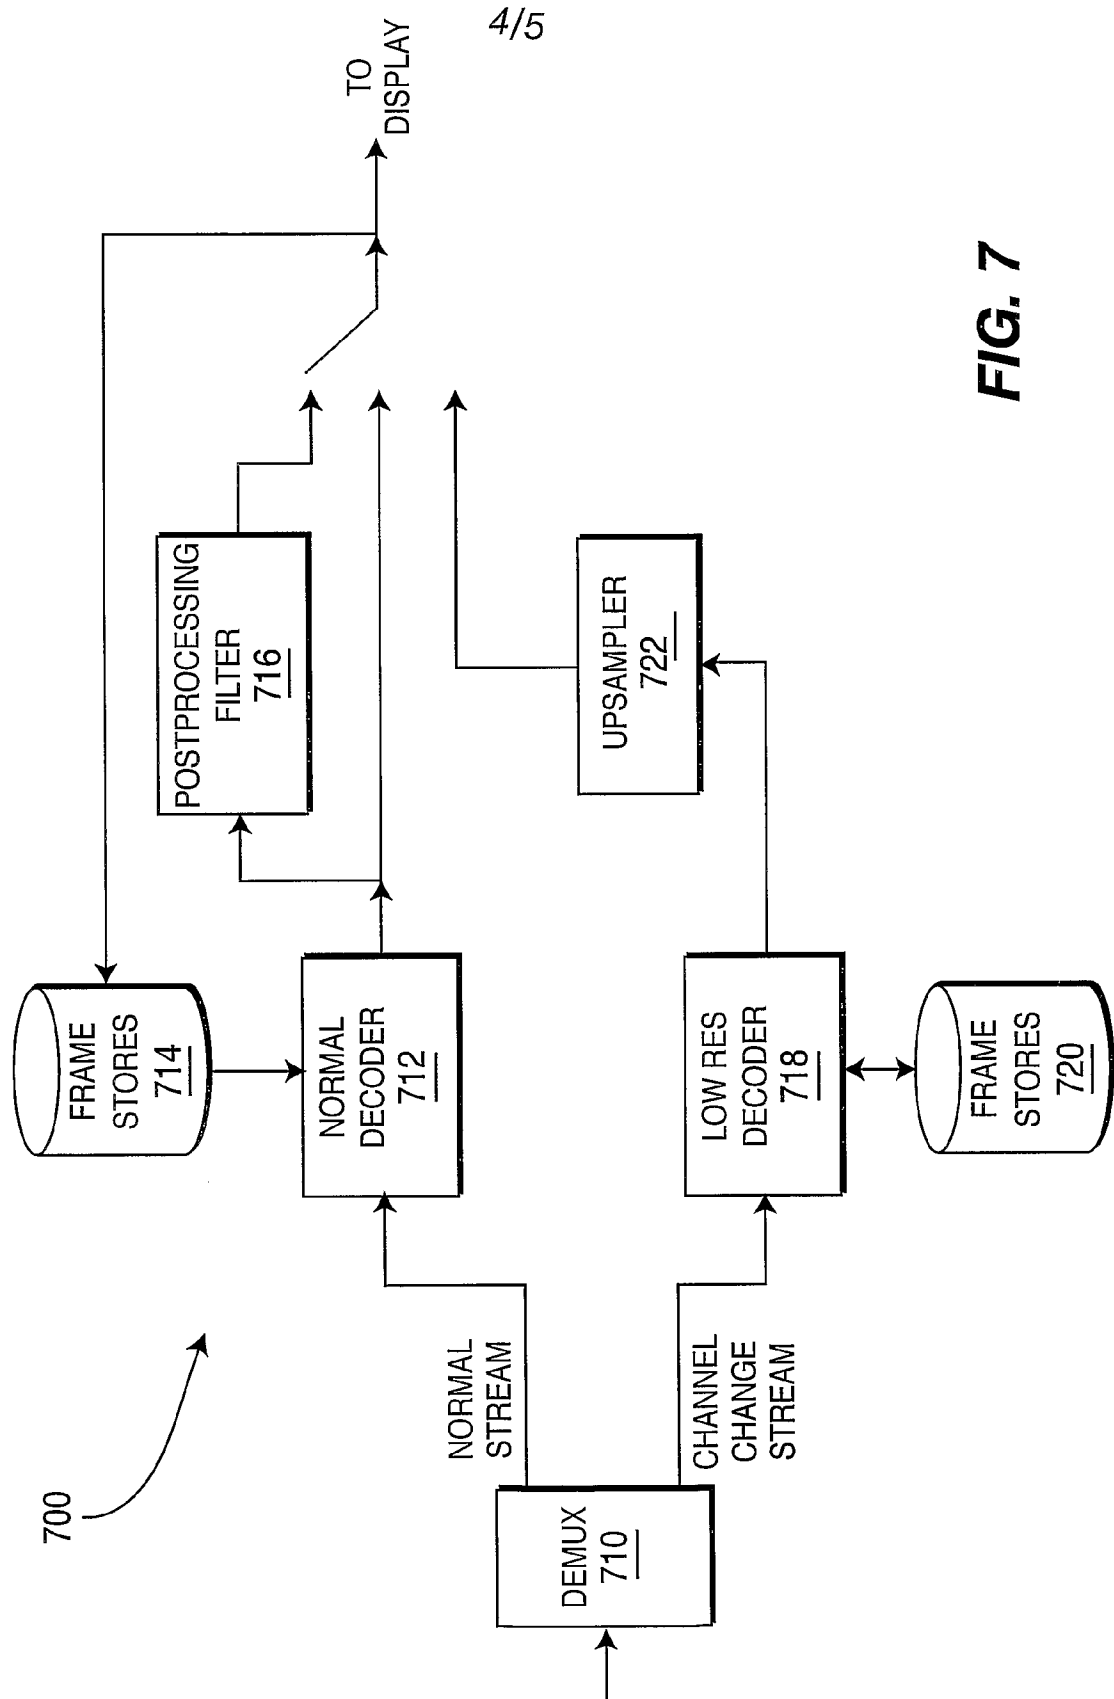
PictureNum	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
Normal	I	B	B	P	B	B	P	B	B	P	B	B	P	B	B	P	B	B	P	B	B	P	B	B	P
ChannelCh	I												I												I

PictureNum	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48
Normal	B	B	P	B	B	P	B	B	P	B	B	I	B	B	P	B	B	P	B	B	P	B	B	P
ChannelCh																								I

**FIG. 4**

**FIG. 5****FIG. 6**

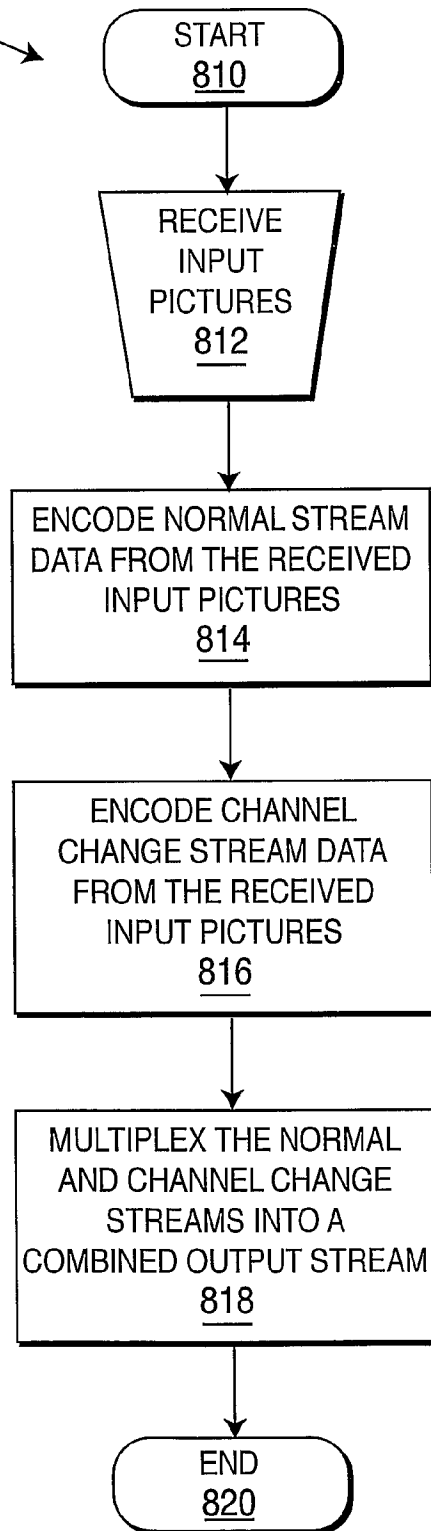


**FIG. 7**

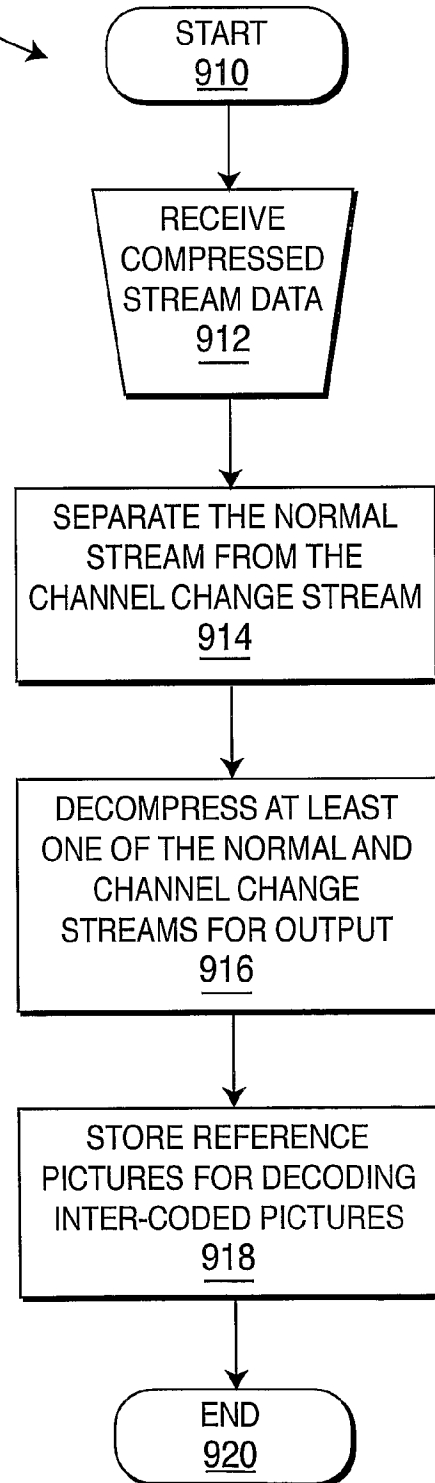


5/5

800

**FIG. 8**

900

**FIG. 9**

# INTERNATIONAL SEARCH REPORT

International Application No  
1/US2004/018763

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H04N7/24 H04N7/50

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	KARCZEWICZ M ET AL: "A Proposal for SP-frames" ITU TELECOMMUNICATIONS STANDARDIZATION SECTOR VCEG-L27, XX, XX, 9 January 2001 (2001-01-09), pages 1-9, XP002287038 page 1, paragraph MOTIVATION - page 2, last line ; figure 2 ----- -/--	1-15

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

9 November 2004

Date of mailing of the international search report

23/11/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Schoeyer, M

# INTERNATIONAL SEARCH REPORT

International Application No.

US/US2004/018763

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	HORN U ET AL: "Robust Internet video transmission based on scalable coding and unequal error protection" SIGNAL PROCESSING. IMAGE COMMUNICATION, ELSEVIER SCIENCE PUBLISHERS, AMSTERDAM, NL, vol. 15, no. 1-2, September 1999 (1999-09), pages 77-94, XP004180639 ISSN: 0923-5965 the whole document	1-15
A	US 2003/072370 A1 (GIROD BERND ET AL) 17 April 2003 (2003-04-17)	1-15
A	page 5, paragraph 49 - page 5, paragraph 53; figures 2,7 page 7, paragraph 67 - paragraph 68	
P,A	UGUR K ET AL: "Combining bitstream switching and FGS for H.264 scalable video transmission over varying bandwidth networks" 2003 IEEE PACIFIC RIM CONFERENCE ON COMMUNICATIONS COMPUTERS AND SIGNAL PROCESSING, vol. 2, 28 August 2003 (2003-08-28), pages 972-975, XP010660478 VICTORIA, BC, CANADA page 82, left-hand column, paragraph 4 - page 84, right-hand column, paragraph 4.2	1-15

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

US/US2004/018763

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003072370 A1	17-04-2003	US 6480541 B1	12-11-2002